



Bonneagar Iompair Éireann
Transport Infrastructure Ireland

TII Publications



Notes for Guidance on the Specification for Road Works Series 1300 - Road Lighting Columns and CCTV Masts

CC-GSW-01300

May 2019

About TII

Transport Infrastructure Ireland (TII) is responsible for managing and improving the country's national road and light rail networks.

About TII Publications

TII maintains an online suite of technical publications, which is managed through the TII Publications website. The contents of TII Publications is clearly split into 'Standards' and 'Technical' documentation. All documentation for implementation on TII schemes is collectively referred to as TII Publications (Standards), and all other documentation within the system is collectively referred to as TII Publications (Technical).

Document Attributes

Each document within TII Publications has a range of attributes associated with it, which allows for efficient access and retrieval of the document from the website. These attributes are also contained on the inside cover of each current document, for reference.

TII Publication Title	<i>Notes for Guidance on the Specification for Road Works Series 1300 - Road Lighting Columns and CCTV Masts</i>
TII Publication Number	CC-GSW-01300

Activity	<i>Construction & Commissioning (CC)</i>	Document Set	<i>Standards</i>
Stream	<i>Guidance on Specification for Works</i>	Publication Date	<i>May 2019</i>
Document Number	<i>01300</i>	Historical Reference	<i>Series NG 1300</i>

TII Publications Website

This document is part of the TII publications system all of which is available free of charge at <http://www.tiipublications.ie>. For more information on the TII Publications system or to access further TII Publications documentation, please refer to the TII Publications website.

TII Authorisation and Contact Details

This document has been authorised by the Director of Professional Services, Transport Infrastructure Ireland. For any further guidance on the TII Publications system, please contact the following:

Contact: Standards and Research Section, Transport Infrastructure Ireland
 Postal Address: Parkgate Business Centre, Parkgate Street, Dublin 8, D08 DK10
 Telephone: +353 1 646 3600
 Email: infoPUBS@tii.ie

TII Publications



Activity:	Construction & Commissioning (CC)
Stream:	Guidance on the Specification for Works (GSW)
TII Publication Title:	Notes for Guidance on the Specification for Road Works Series 1300 - Road Lighting Columns and CCTV Masts
TII Publication Number:	CC-GSW-01300
Publication Date:	May 2019
Set:	Standards

Contents

1. **General**..... 1

2. **Design of Lighting Columns and CCTV Masts, Foundations, Anchorages and Attachment Systems** 2

3. **Data Sheets**..... 3

4. **Identification and Location Markings** 4

5. **Installation of Foundations, Anchorages and Attachment Systems** 5

6. **Site Tests on Anchorages in Drilled Holes** 6

7. **Materials and Surface Finishes**..... 7

8. **Handling, Transport and Erection**..... 8

9. **Amendments and Additions to IS EN 40-5 and IS EN 40-6 for Lighting Columns and CCTV Masts** 9

10. **Amendments and Additions to IS EN 40-2 for Lighting Columns and CCTV Masts**
11

11. **Attachments to Lighting Columns and CCTV Masts**..... 12

12. **Laminated Glass Fibre Reinforced Plastic (GFRP) Lighting Columns** 13

13. **Brackets for Laminated GFRP Lighting Columns** 14

14. **NG SAMPLE APPENDIX 13/1: INFORMATION TO BE PROVIDED WHEN SPECIFYING LIGHTING COLUMNS**..... 15

15. **NG APPENDIX 13/3 INSTRUCTIONS FOR COMPLETION OF LIGHTING COLUMN AND BRACKET DATA SHEETS** 20

16. NG SAMPLE APPENDIX 13/4: INFORMATION TO BE PROVIDED WHEN SPECIFYING CCTV MASTS..... 22

17. NG APPENDIX 13/6: INSTRUCTIONS FOR COMPLETION OF CCTV MAST DATA SHEETS 26

18. NG APPENDIX 13/7: INSTALLATION CERTIFICATE FOR LIGHTING COLUMN ... 27

**Updates to TII Publications resulting in changes to
Notes for Guidance on the Specification for Road Works Series 1300 - Road Lighting
Columns and CCTV Masts CC-GSW-01300**

Date: May 2019

Page No: General

Section No: General

Amendment Details:

Incorporation of:

New format to match TII format (from UK SHW format);
Updating of referencing to TII publications;
Inclusion of CCTV masts and incorporating ILP PLG 07;
Technical Acceptance requirements reflect current practice including incorporation of Installation Certificates for lighting columns and CCTV masts;
Changes to reflect additional parts of IS EN 40 lighting column standards which replace BS 5649 that was withdrawn in 2000s; and
Removal of Sections that are no longer relevant given BS 5649 has now been replaced with IS EN 40.

Contents Table

1. General.....	1
2. Design of Lighting Columns and CCTV Masts, Foundations, Anchorages and Attachment Systems	2
3. Data Sheets.....	3
4. Identification and Location Markings	4
5. Installation of Foundations, Anchorages and Attachment Systems	5
6. Site Tests on Anchorages in Drilled Holes	6
7. Materials and Surface Finishes.....	7
8. Handling, Transport and Erection.....	8
9. Amendments and Additions to IS EN 40-5 and IS EN 40-6 for Lighting Columns and CCTV Masts	9
10. Amendments and Additions to IS EN 40-2 for Lighting Columns and CCTV Masts 11	11
11. Attachments to Lighting Columns and CCTV Masts.....	12
12. Laminated Glass Fibre Reinforced Plastic (GFRP) Lighting Columns	13
13. Brackets for Laminated GFRP Lighting Columns	14
14. NG SAMPLE APPENDIX 13/1: INFORMATION TO BE PROVIDED WHEN SPECIFYING LIGHTING COLUMNS.....	15
15. NG APPENDIX 13/3 INSTRUCTIONS FOR COMPLETION OF LIGHTING COLUMN AND BRACKET DATA SHEETS	20
16. NG SAMPLE APPENDIX 13/4: INFORMATION TO BE PROVIDED WHEN SPECIFYING CCTV MASTS.....	22
17. NG APPENDIX 13/6: INSTRUCTIONS FOR COMPLETION OF CCTV MAST DATA SHEETS	26
18. NG APPENDIX 13/7: INSTALLATION CERTIFICATE FOR LIGHTING COLUMN ...	27

1. General

Design Standard DN-STR-03018 is complementary to the Specification and includes details of the acceptable materials and dimensional limitations.

The Specification includes design requirements since the Contractor is required to propose columns and brackets and CCTV masts, which have been designed by the manufacturer. Requirements also include for the design of foundations for planted lighting columns to meet the Employer's Representative's stated requirements, and to submit designs to the Employer's Representative for acceptance. This responsibility includes for the design of planted lighting columns for each of the types of soil listed in Appendices 13/1 and where required, the design of foundations for columns and masts with flange plates.

Electrical engineering requirements for lighting columns are given in Series 1400. Electrical engineering requirements for CCTV masts should be as described in Appendices 15/1.

Wall mounting bracket positions should be detailed on the Drawings. Details of the provision to be made for electrical services e.g. ducting, conduits, junction boxes, etc. should also be shown on the Drawings.

Where wall mounted brackets and fixtures are required, wayleaves, i.e. permission to fix and maintain, may be necessary.

The Contractor should ensure that ESB Networks Limited have confirmed their approval to the clearances provided to overhead lines and provide evidence to the Employer's Representative that agreement has been reached in advance of installation.

The information to be provided by the Employer's Representative at the time of inviting tenders should be given in Appendices 13/1 and 13/4.

Further advice is published in TII Publication (Standards), activity Design (DN) within streams Lighting (LTN), Intelligent Transport Systems (ITS), Structures (STR) and Environmental (ENV).

2. Design of Lighting Columns and CCTV Masts, Foundations, Anchorages and Attachment Systems

The Contractor is required to submit to the Employers Representative, Installation Certificates for lighting columns and CCTV masts as shown in Appendix 13/7 and 13/8 unless otherwise described in Appendix 13/1 and 13/4.

The Contractor should normally be made responsible for the design of wall mounted brackets and fixings. The wall on which mounted brackets are to be fixed should be checked to ensure the following:

- i. The ownership of the wall to ensure that consent is given and that wayleaves are not required.
- ii. That it is capable of carrying the additional loads and other forces that may be transmitted by the bracket.

Aesthetic Requirements

The Contractor's designs of columns, masts and luminaires, including bracket arms, are to be submitted to the Employer's Representative.

3. Data Sheets

The information required on the completed Data Sheets is that which is necessary to ensure that the equipment being offered satisfies the requirements of both the Specification and Design Standard DN-STR-03018. Typical Standard Data Sheets are included in Appendices 13/2 and 13/5 of these Notes for Guidance. The information provided by the Employer's Representative, including that in Appendices 13/1 and 13/4 should be all that is necessary to enable the Contractor to complete the Data Sheets in accordance with the "Instructions for Completion of Data Sheets" shown in Appendices 13/3 & 13/6.

In completing and submitting the Data Sheets the Contractor confirms suitability of the columns, foundations, masts, housings, mountings and luminaires being offered.

Appendices 13/1 and 13/4 should specify the date by which completed Data Sheets are to be submitted.

Where these are required at the time of tender this should be stated in Appendices 13/1 and 13/4 and the information provided by tenderers should be sufficient to evaluate the tenders and suitability of equipment being offered.

Appendix 1/4 should list the Contractor's detail drawings which are to be submitted. Such drawings are normally submitted after the Contract is awarded unless there is good reason to specify otherwise. Drawings are usually required to give details unique to the scheme which can be of assistance to the road authority, eg sizes and centres of foundation holding down bolts, etc. Drawings which show only general construction details are not usually required.

4. Identification and Location Markings

The location marking required for each column and mast will vary throughout the country and instructions in the Contract should generally be agreed with the road authorities concerned. The following should be specified:

- i. The direction in which the numbers should face.
- ii. The colour and background of the numbers.
- iii. The size of the numbers and distance above ground.
- iv. Method of marking e.g. in paint or plastic, etc.
- v. Number of marks on each column and mast shafts (generally two for columns and masts on central reserve).
- vi. The mark which will enable a particular column/mast to be located.
- vii. Any distinctive system in order to highlight the location number at night.

5. Installation of Foundations, Anchorages and Attachment Systems

Planted columns are backfilled over the full planting depth with either concrete or earth backfill in accordance with CC-SPW-01300 – Specification for Road Works Series 1300 – Road Lighting Columns and CCTV Masts, Section 5. A combination of concrete and earth backfill is not permitted as this may alter the stress distribution on the column post.

Examples of the evidence required for Site Tests on Anchorages in drilled holes CC-SPW-01300 – Specification for Road Works Series 1300 – Road Lighting Columns and CCTV Masts, Section 6 include:

- i. the results of testing to BS 5080 and should be undertaken by an appropriate organisation accredited in accordance with sub-Clauses 105.3 and 105.4 for such test; or
- ii. a Certificate from any UAETC member together with the results of testing to the European Union of Agrément Directive for Assessment of Anchor Bolts MOAT No. 42 (adapted to include only anchorage types permitted by the Specification).

An example of the evidence required for anchorages in drilled holes that is capable of resisting pulsating loading is the result of testing to Clause 5.4.2.5 of MOAT No 42 (adapted to include only anchorage types permitted by the Specification).

If the four-week time period required CC-SPW-01300 – Specification for Road Works Series 1300 – Road Lighting Columns and CCTV Masts, Section 5 is unrealistic then the appropriate time period should be stated in Appendices 13/1 and 13/4.

Failures of anchorages in drilled holes are known to occur due to either the lack of cleanliness of the hole or the excessive tolerances of the size of the hole. The manufacturer of the anchorage should give the maximum tolerance permitted and the evidence submitted in accordance with CC-SPW-01300 – Specification for Road Works Series 1300 – Road Lighting Columns and CCTV Masts, Section 5 should show that the anchorages are satisfactory when installed in holes having these maximum tolerances.

Where lighting columns and CCTV masts to be installed on bridge decks, columns and masts with flange plates should be used. Care should be taken to avoid damaging bridge deck waterproofing. Normally an anchorage and attachment system which avoids this problem should be used. In exceptional circumstances, where damage to the waterproofing is unavoidable, a compatible sealing system to prevent ingress of water and avoid corrosion should be used.

Where attachment systems are used, the bolts or nuts are to be tightened adequately in accordance with the manufacturer's instructions, to ensure that the attachment system does not work loose when subject to wind loading. In addition, it is important to ensure an adequate length of thread engagement.

Sealing of voids in anchorages, attachment systems and flange plates with a non-setting passive filler is important to prevent ingress of water and to avoid corrosion.

6. Site Tests on Anchorages in Drilled Holes

The Contractor is responsible for carrying out Site tests and, where required, for designing the anchorages. Anchorages should be selected on behalf of the Employer's Representative to be tested within the frequency given in Appendix 1/5.

Where anchorages in drilled holes are designed by the Contractor, it should be established to the satisfaction of the Employer's Representative that the Contractor's calculations for the nominal tensile load have been correctly carried out and have been checked, before selecting the anchorages for testing.

The Contractor's test record documents should be included in the as-built records.

7. Materials and Surface Finishes

The system of protection for steel columns and CCTV masts is dependent upon the environment, utilizing the information given in Series NG 1900 and the requirements stated in Appendix 19/1.

A suitable quality of the surface protection for temporary lighting columns and brackets and CCTV masts should be specified in Appendix 19/1. The full requirements of Series 1900 for such lighting, and CCTV masts may not be necessary.

Metal fixings to columns should also comply with the requirements of Series 1300. No protection to the column is normally required.

8. Handling, Transport and Erection

Not Used.

9. Amendments and Additions to IS EN 40-5 and IS EN 40-6 for Lighting Columns and CCTV Masts

Welding

Prior to the anticipated start of manufacture of columns and masts, copies of the most recent certified destructive test reports covering those component types to be supplied under the Contract should be available for inspection.

Sample column/mast components and/or joints for destructive testing should be selected by a Welding Inspector certified by CSWIP or equivalent. Selection should be made taking into account the manufacturer's inspection reports, previous destructive test reports and observations of current production practice on similar column types. Samples should be selected on the basis that they represent the lower end of quality in the production batch. Particular attention should be given to any features which could adversely affect the true throat size or the mechanical properties of the materials or introduce stress raisers transverse to the member axis.

For the purposes of defining lighting column types in 7.1.5, differences in either member cross-sectional shape, joint configuration or weld type, constitute a change in lighting column types. Variations in parent metal thickness or weld throat dimension from the specified sizes on the sample selected for destructive test may be included within the same lighting column types up to a limit of $\pm 40\%$.

Sample components and/or joints selected for destructive testing should be indelibly marked and dispatched to a testing laboratory appropriately accredited in accordance with sub-Clauses 105.3 and 105.4 for weld testing.

The following points should be considered when ascertaining the acceptability of components subject to destructive testing:

- i. Each length of weld between weld ends or changes of direction should be sectioned at intervals not exceeding 100 mm. Circumferential welds should be sectioned on at least 2 diameters. Post seam welds should be sectioned at a minimum of 4 locations along their length. One side of each section should be ground, filed, finished or machined to a finish at least as smooth as that produced by a 120 grit paper to BS 871, so that the actual throat and leg dimensions can be measured and any discontinuities exposed. One nick break test in accordance with BS 709 on a length of weld of not less than 25 mm should be made for each joint type on each component. Additional sections and nick break tests may be required in cases of borderline acceptance. Non-conformances with the imperfection acceptance levels of IS EN ISO 15614-1 or IS EN ISO 15609-2, as appropriate should be recorded. Non-conformances with the requirements of 7.1.4 should be cause for rejection, except that in 7.1.4.2 the throat and leg dimensions should be the true rather than the apparent dimensions.
- ii. One representative section from each joint type for each type of column should be prepared for macro-examination. A hardness survey should be done where any of the parent material thickness exceeds 20 mm. An additional macro-examination should be made of each non-conforming weld.

- iii. The results of the destructive tests including macrographs should be reported and a certified copy sent to the manufacturer. In the event of non-conformances being found the Contractor and manufacturer should be notified as soon as possible. The test specimens, uniquely identified by hard stamped marks should be returned to the manufacturer's works.

10. Amendments and Additions to IS EN 40-2 for Lighting Columns and CCTV Masts

Not used.

11. Attachments to Lighting Columns and CCTV Masts

Not Used.

12. Laminated Glass Fibre Reinforced Plastic (GFRP) Lighting Columns

Manufacture of GFRP Laminates

The internal surface of the column should not contain any dry patches but may show the presence of cracking in resin-rich layers or occasional bubbles. These do not affect the strength of the column and may be ignored.

The thickness of the column may vary step-wise along its length. Around the door area, additional reinforcement layers should generally be provided dependent on design requirements.

13. Brackets for Laminated GFRP Lighting Columns

Not Used.

NG SAMPLE APPENDIX 13/1: INFORMATION TO BE PROVIDED WHEN SPECIFYING LIGHTING COLUMNS

[Notes to compiler:]

Appendix 13/1 should be specific and provide all the information which a tenderer will need in addition to information provided elsewhere in the documents; in order to submit a tender. Reference should be made in Appendix 13/1 to other relevant documents, e.g. drawings.

The requirements for each type of lighting column should include the following information as applicable:

- i. number of columns;
- ii. nominal height of column;
- iii. bracket projection, single or double: or whether post-top fitting;
- iv. luminaire weight and windage area and centres of application of the forces from the centroid of the column shaft;
- v. size, length and angle of luminaire fixing;
- vi. location of column, ie terrain category, exposure coefficient ($C_e(z)$), topography factor (f) and reference wind velocity speed ($V_{ref,0}$) as defined in IS EN 40-3-1;
- vii. height of installation above ground level, ie for lighting columns mounted on a structure or embankment the height of installation should include the nominal height of the column plus the height of the datum above the adjacent ground level;
- viii. type of column base, ie planted with or without base plate or column with flange plate;
- ix. list of columns with flange plates where the Contractor is to design the foundations, anchorages and attachment systems;
- x. information on soil types for design in accordance with IS EN 40 : Part 2 for individual or groups of columns;
- xi. requirements for earth backfill if not to be Class 8 as described in CC-SPW-01300 – Specification for Road Works Series 1300 – Road Lighting Columns and CCTV Masts, Section 5;
- xii. size and number of door openings, number of doors to be fitted with hinges or metal chains and direction doors are to face;
- xiii. size requirements for base compartments;
- xiv. acceptable column materials and types in very exposed sites as defined in Standard DN-STR-03018;
- xv. passive safe (IS EN 12767):
 - a) Impact Class;

- b) Performance Level;
 - c) Occupant safety Level (A-D);
 - d) Backfill type (Types S, R or X);
 - e) Collapse mode (SE: Separation and NS: No Separation); and
 - f) Directional sensitivity (SD: Single Directional, BD: Bi Directional and MD: Multi Directional).
- xvi. provide information as required in Appendix 19/1;
 - xvii. any specific requirements for aesthetic approval of lighting column and bracket combinations;
 - xviii. number of door keys if different from CC-SPW-01300 – Specification for Road Works Series 1300 – Road Lighting Columns and Brackets and CCTV Masts, Section 10;
 - xix. identification and location markings;
 - xx. requirements for wall mountings including fixings;
 - xxi. requirements for earthing [see CC-GSW-01400 – Specification for Road Works Series 1400 – Electrical Work for Road Lighting and Traffic Signs, Section 20];
 - xxii. columns to be mounted on structures or in situations where there is a risk that a detached door could cause an accident if it fell onto the area below;
 - xxiii. any other special requirements, e.g. dimension 'X' for cable entry slot width, signs and attachments in excess of Standard DN-STR-03018 requirements; and
 - xxiv. requirements of ESB Networks Limited including warning notices regarding proximity to overhead power lines.

Latest date by which completed Data Sheets shall be provided. [This date should generally be not earlier than 2 weeks after the date of award of Contract; however, there may be special reasons to advance this date, such as when there is a requirement for lighting columns of high aesthetic standard. This date may sometimes be better determined after the award of Contract based on the Contractor's programme and his reasonable lead-times for approval and procurement. CC-SPW-01300 – Specification for Road Works Series 1300 – Road Lighting Columns and CCTV Masts, Section 3].

NG APPENDIX 13/2: (SPECIFICATION FOR ROAD WORKS) TYPICAL LIGHTING COLUMN AND BRACKET DATA – SHEET 1

Name of Manufacturer


Column Reference No.	
Revision No.	
Date	

NAME OF CONTRACT

Part A – General

Column nominal height		(m)
Column material		
Material design strength		(N/mm ²)
No. of door openings		
Door opening size – Height		(mm)
- Width		(mm)
Cross-section of the base compartments		
		Height (mm)
		Width (mm)
		Depth (mm)

Acceptable positions of bracket arms relative to door position

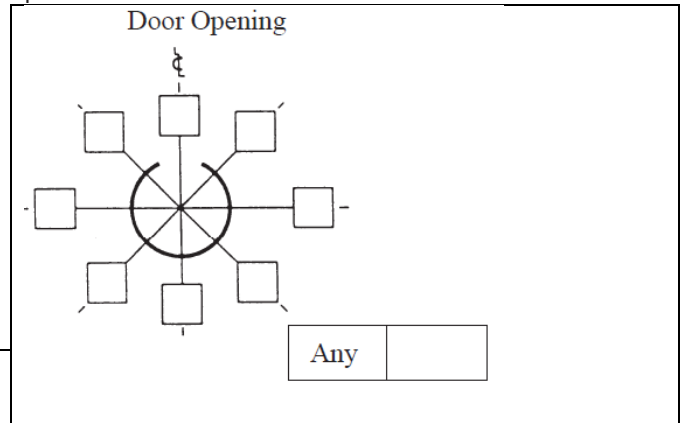

Manufacturer's drawing ref. no.

Corrosion protection (steel columns only) - basic system type

Reference Wind Velocity $V_{ref,0}$ as defined in IS EN 40-3-1	m/s
--	-----

Details of signs and attachments allowed for in the design Area (mm ²), Eccentricity (mm), Height

additional sacrificial steel thickness, above that needed in the design, from the bottom of the column to at least 250mm above the anticipated ground level	(mm)
---	------

Part B – Foundation Data

Planted base	Planting depth	(m)
--------------	----------------	-----

Standard Soil Type Factor G		
630	390	230

Diameter of concrete surround (if any)

Flange plate	Bolt hole centres	Bolt hole diameter	Design load/bolt
	(mm)	(mm)	(N)

Relevant forces and moments at ground level
Line of action of max. moment relating to door opening

NOTE: For flange plates with slotted holes a diagram shall be included with this Data Sheet.

NG APPENDIX 13/2: (SPECIFICATION FOR ROAD WORKS) TYPICAL LIGHTING COLUMN AND BRACKET DATA - SHEET 2

Part C Acceptable Luminaires

Luminaire: Maximum Characteristics

Post Top Column	Luminaire Connection		Terrain Categories as defined in IS EN 40-3-1										
			I	II	III	IV							
			Maximum Windage Area (m ²) for Terrain Categories as defined in IS EN 40-3-1										
	Diameter	Length											

Single Arm Bracket Column	Luminaire Lever Arm (mm)	
	Due to wt of luminaire	Due to windage on luminaire

Bracket Projection (m)	Ref No.	Drawing No.	Material		Luminaire Fixing Angle	Luminaire Connection		Luminaire Maximum Wt (kg)	Maximum Windage Area (m ²) for terrain Categories as defined in IS EN 40-3-1				
			Grade	Design Strength (N/mm ²)		Diameter (mm)	Length (mm)						

Double Arm Bracket Column	Luminaire Lever Arm (mm)	
	Due to wt of luminaire	Due to windage on luminaire

Bracket Projection (m)	Ref No.	Drawing No.	Material		Luminaire Fixing Angle	Luminaire Connection		Luminaire Maximum Wt (kg)	Maximum Windage Area (m ²) for terrain Categories as defined in IS EN 40-3-1				
			Grade	Design Strength (N/mm ²)		Diameter (mm)	Length (mm)						

Part D Certification

It is certified that the information given in this Data Sheet has been obtained in accordance with IS EN 40 and Series 1300 Specification

Signed on behalf of the Contractor Date

NG APPENDIX 13/3: INSTRUCTIONS FOR COMPLETION OF LIGHTING COLUMN AND BRACKET DATA SHEETS

General

1. When information is not required a dash shall be inserted in the appropriate boxes.
2. Where a Data Sheet is amended it shall be given a new revision number with a date.
3. The revision numbers shall be consecutive letters of the alphabet, commencing with "A".
4. The date of the revision shall agree with the date of the Contractor's signature.
5. The column, or bracket material shall be steel, aluminium, reinforced or pre-stressed concrete, glass fibre reinforced plastic or any other suitable material.
6. The material design strength shall be the minimum specified in the design. Where more than one material is used values for all materials shall be given.
7. All relevant entries shall be made on the Data Sheet before the document is certified by the Contractor.

Column Data

8. The column nominal height shall be selected from clause 4.1 of IS EN 40-2 as appropriate.
9. The number of door openings shall agree with the manufacturer's drawing.
10. The cross-section of the base compartment shall be indicated by a dimensioned diagram/sketch.
11. The acceptable positions of bracket arms relative to the door position shall be indicated on the diagram. Where all positions are acceptable the box noted "ANY" shall be ticked.
12. Where concrete is necessary around the planted base in accordance with CC-SPW-01300 – Specification for Road Works Series 1300 – Road Lighting Columns and CCTV Masts, Section 5 the minimum diameter shall be entered.
13. For flange bases all forces and moments used in the design of the foundations, anchorages and attachment systems shall be given.
14. The corrosion protection system used on the column when new shall be recorded. Where additional steel is provided for sacrificial purposes the amount shall be recorded.
15. The signs and attachments surface area, eccentricity from the centre line of the column to the centre of area of the sign and height above ground level to the centre of area of the sign shall be stated.

Bracket Data

16. The luminaire lever arms, weight and maximum windage area quoted shall be based on the most adverse loading on the bracket when it is attached to any of the columns quoted in the compatible column sections.

(Note: The luminaire lever arms are the horizontal distances from the centre of gravity of the luminaire and, if applicable, the centroid of the windage surface area to the end of the bracket joint).

NG SAMPLE APPENDIX 13/4: INFORMATION TO BE PROVIDED WHEN SPECIFYING CCTV MASTS

[Notes to compiler:]

Appendix 13/4 should be specific and provide all the information which a tenderer will need in addition to information provided elsewhere in the documents, in order to submit a tender. Reference should be made in Appendix 13/4 to other relevant documents, e.g. drawings.

The requirements for each type of CCTV mast should include the following information as applicable:

- i. number of masts;
- ii. nominal height of masts;
- iii. type of camera mounting;
- iv. camera and housing weight and windage area and centres of application of the forces from the centroid of the column shaft;
- v. size, length and angle of camera mounting;
- vi. location of mast, i.e. National Grid Reference/ Irish Transverse Mercator (ITM) coordinates;
- vii. effective wind speed, V_e (m/s) as defined in the Institution of Lighting Professionals Technical Report PLG 07 (High Mast for Lighting & CCTV);
- viii. height of installation above ground level, i.e. for CCTV masts mounted on a structure or embankment the height of installation should include the nominal height of the mast plus the height of the datum above the adjacent ground level;
- ix. list of masts with flange plates where the Contractor is to design the foundations, anchorages and attachment systems;
- x. size and number of door openings, number of doors to be fitted with hinges or metal chains and direction doors are to face;
- xi. size requirements for base compartments;
- xii. acceptable mast materials;
- xiii. acceptable corrosion protection treatments, as Appendix 19/1;
- xiv. any specific requirements for aesthetic approval of CCTV masts;
- xv. number of door keys if different from CC-SPW-01300 – Specification for Road Works Series 1300 – Road Lighting Columns and CCTV Masts, Section 10;
- xvi. identification and location markings;
- xvii. requirements for earthing [see CC-GSW-01400 – Specification for Road Works Series 1400 – Electrical Work for Road Lighting and Traffic Signs, Section 20];
- xviii. (xviii) masts to be mounted on structures or in situations where there is a risk that a detached door could cause an accident if it fell onto the area below;
- xix. any other special requirements, eg details of special attachments to the CCTV masts;

- xx. requirements of ESB Networks Limited including warning notices regarding proximity to overhead power lines.

Latest time by which complete Data Sheets shall be provided. [This date should generally not be earlier than 2 weeks after the date of award of Contract; however, there may be special reasons to advance this date, such as when there is a requirement for CCTV masts of high aesthetic standard. This date may sometimes be better determined after the award of Contract based on the Contractor's programme and his reasonable lead-times for approval and procurement. CC-SPW-01300 – Specification for Road Works Series 1300 – Road Lighting Columns and CCTV Masts, Section 3].

NG APPENDIX 13/5: (SPECIFICATION FOR ROAD WORKS) TYPICAL CCTV MAST DATA


Name of Manufacturer	Mast Reference No.	
	Revision No.	
	Date	

NAME OF CONTRACT

Part A – General

Mast nominal height		(m)
Mast material		
Material design strength		(N/mm ²)
No. of door openings		
Door opening size		(mm)
Width		(mm)

Acceptable positions of bracket arms relative to door position

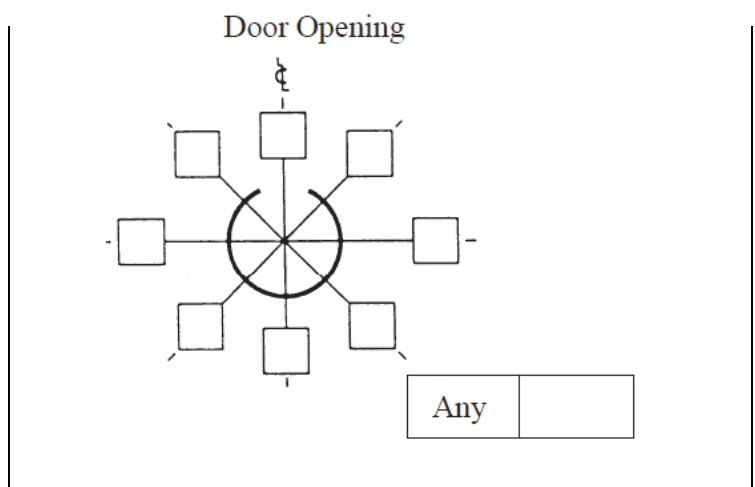

Manufacturer's drawing ref. no.

Cross-section of the base compartments	Height (mm)	Width (mm)	Depth (mm)

Attachments	Area (mm ²)	Eccentricity (mm)	Height (mm)

Design Information (as defined in the Institution of Lighting Professionals Technical Report PLG 07 (High Mast for Lighting & CCTV))

Response Factor (β)	Effective wind speed V_e		m/s
	Size reduction factor (\ddot{a})		

Corrosion protection - basic system type (See CC-SPW-01900-03, section 11). Details of signs and attachments allowed for in the design Area (mm²), Eccentricity (mm), Height (mm)

--

Part B – Foundation Data

Flange plate	Bolt hole centres	Bolt hole diameter	Design load/bolt
	(mm)	(mm)	(N)

Relevant forces and moments at ground level

--

Line of action of max. moment relating to door opening

NOTE: For flange plates with slotted holes a diagram shall be included with this Data Sheet.

Part C – Acceptable CCTV Cameras, Housings and Mountings

Mounting Reference No.	<input type="text"/>	Drawing No.	<input type="text"/>
Material grade	<input type="text"/>	Material design strength	<input type="text"/> (N/mm ²)
Combined CCTV Camera, Housing and Mounting Maximum Weight	<input type="text"/> (kg)		
CCTV Camera, Housing and Mounting Maximum Windage Areas	<input type="text"/> (m ²)		
Lever arm of CCTV Camera, Housing and Mounting - due to weight	<input type="text"/> (m)		
- due to windage	<input type="text"/> (m)		

Part D - Certification

It is certified that the information given in this Data Sheet has been obtained in accordance with the requirements of ILP PLG 07 and Series 1300 Specification.

Signed on behalf of the Contractor:

Date:

NG APPENDIX 13/6: INSTRUCTIONS FOR COMPLETION OF CCTV MAST DATA SHEETS

General

1. When information is not required a dash shall be inserted in the appropriate boxes.
2. Where a Data Sheet is amended it shall be given a new revision number with a date.
3. The revision numbers shall be consecutive letters of the alphabet, commencing with "A".
4. The date of the revision shall agree with the date of the Contractor's signature.
5. The mast shall be steel.
6. The material design strength shall be the minimum specified in the design. Where more than one material is used values for all materials shall be given.
7. All relevant entries shall be made on the Data Sheet before the document is certified by the Contractor.

Mast Data

8. The mast nominal height shall be as defined in Standard DN-STR-03018, clause as appropriate.
9. The number of door openings shall agree with the manufacturer's drawing.
10. The cross-section of the base compartment shall be indicated by a dimensioned diagram/sketch.
11. The acceptable positions of the mounting relative to the door position shall be indicated on the diagram. Where all positions are acceptable the box noted "ANY" shall be ticked.
12. For flange bases all forces and moments used in the design of the foundations, anchorages and attachment systems shall be given.
13. The corrosion protection system used on the column when new shall be recorded. Where additional steel is provided for sacrificial purposes the amount shall be recorded.
14. The signs and attachments surface area, eccentricity from the centre line of the mast to the centre of area of the sign and height above ground level to the centre of area of the sign shall be stated.

Equipment Data

15. The lever arms, weight and maximum windage area quoted for the CCTV camera with associated mountings and housings shall be based on the most adverse loading when it is attached to any of the masts quoted in the compatible mast sections.

(Note: The lever arms are the horizontal distances from the centre of gravity of the CCTV camera with associated mounting and housing and, if applicable, the centroid of the windage surface area to the centreline of the mast.)

NG APPENDIX 13/7: INSTALLATION CERTIFICATE FOR LIGHTING COLUMN

NAME OF PROJECT: CERTIFICATE NO:

COLUMN REFERENCES:
(if required)

1. We hereby certify to the Employer in respect of the installation of the lighting column(s) accurately shown on:

[LIST DRAWINGS]

that reasonable professional skill and care has been taken and that the installation:

- i. complies with the Works Requirements;
- ii. complies with the requirements set out within DN-LHT-03038 – Design of Road Lighting for the National Road Network (current version on the contract date) of TII Publications;
- iii. has been translated from the relevant schedules, specifications and other documents listed below: and

Including Revision:

.....
.....
.....
.....
.....
.....
.....
.....

- iv. has been installed in accordance with all manufacturer installation manuals and requirements.

DESIGNER & CHECKER/ EMPLOYERS REPRESENTATIVE

Signed: Firm:

Name Date:

(Block Capitals):

Engineering qualifications:

CONTRACTOR

Signed: Firm:

Name Date:

(Block Capitals):

Technical qualifications:

NG APPENDIX 13/8: INSTALLATION CERTIFICATE FOR CCTV MAST

NAME OF PROJECT: CERTIFICATE NO:

MAST REFERENCES:(if required)

1. We hereby certify to the Employer in respect of the installation of the CCTV mast(s) accurately shown on

[LIST DRAWINGS]

that reasonable professional skill and care has been taken and that the installation:

- i. complies with the Works Requirements;
- ii. complies with the requirements set out within DN-STR-03001;
- iii. has been translated from the relevant schedules, specifications and other documents listed below: and
Including Revision:

.....
.....
.....
.....
.....
.....
.....
.....

- iv. has been installed in accordance with all manufacturer installation manuals and requirements.

DESIGNER/ EMPLOYERS REPRESENTATIVE

Signed: Firm:

Name Date:

(Block Capitals):

Engineering qualifications:

CONTRACTOR


Signed: Firm:

Name Date:

(Block Capitals):

Technical qualifications:



 Ionad Ghnó Gheata na Páirce,
Stráid Gheata na Páirce,
Baile Átha Cliath 8, D08 DK10, Éire

 Parkgate Business Centre,
Parkgate Street,
Dublin 8, D08 DK10, Ireland

 www.tii.ie

 info@tii.ie

 +353 (01) 646 3600

 +353 (01) 646 3601