


3.0mm MINIMUM D-SECTION PALES AT 152 CENTRES WELDED TO 50x50x5mm ANGLE RAILS FIXED TO 100x55x6.9 IPE RSJ POST AT 2.75M CENTRES. ALL FIXINGS TO BE VANDAL PROOF.

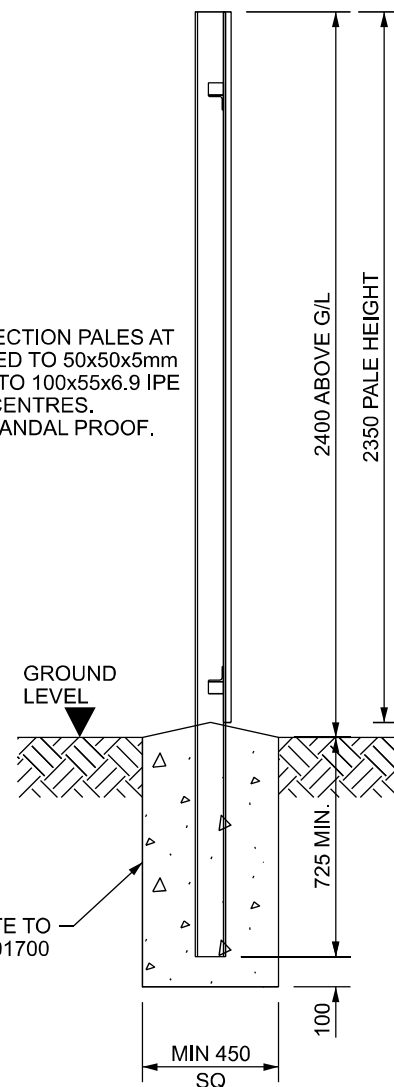

SECTION A - A

NOTES :-

1. ALL DIMENSIONS ARE IN MILLIMETRES.
2. ALL MATERIAL SHALL BE GALVANISED TO EN ISO 1461.
3. THE PALE HEADS MAY BE EITHER DOME OR TRIAD UNLESS SPECIFIED.
4. PALES SHALL BE SECURED TO RAILS AT EVERY INTERSECTION BE MEANS OF WELDING. WELDING SHALL CONSIST OF 3mm FILLET WELDS AT EACH SIDE OF THE PALE.
5. TOP OF THE CONCRETE FOUNDATION TO BE SLOPED TO DRAIN.