


NOTE  
 1. WHERE DETAILS OF FLOOD LEVEL ARE NOT AVAILABLE, A MINIMUM OF 1m OF CLASS 6B/6C SHALL BE USED IN AREAS PRONE TO FLOODING.

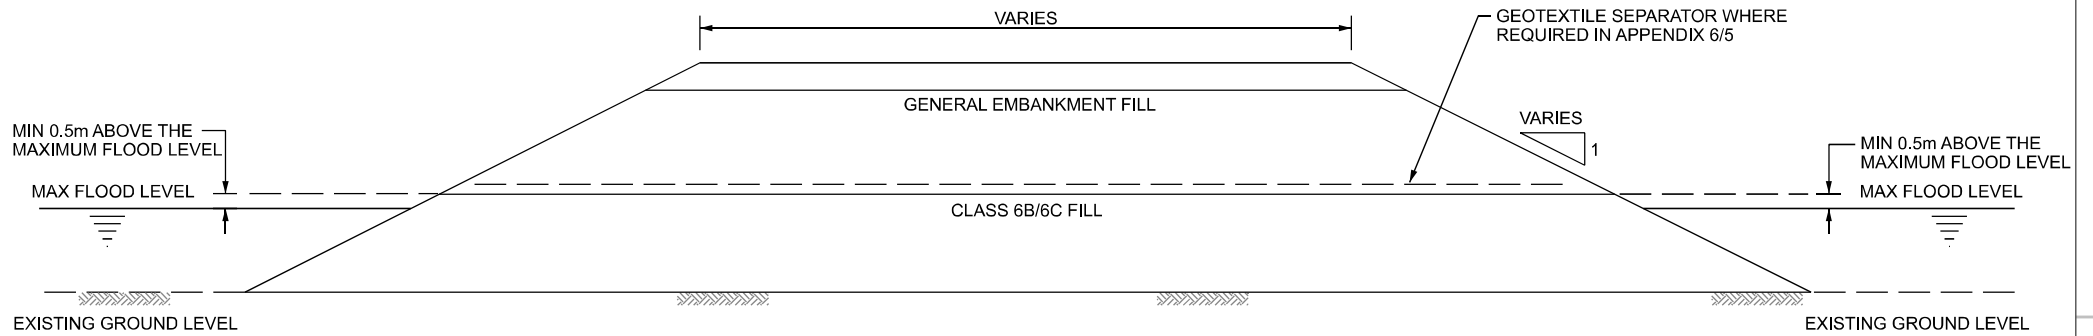

PUBLICATION TITLE  
 EARTHWORKS  
 EMBANKMENT IN AREAS PRONE TO FLOODING

STREAM	ACTIVITY	HISTORICAL REFERENCE	DOCUMENTATION SET	PUBLICATION DATE	PUBLICATION NUMBER		
					ACTIVITY	STREAM	DRAWING NUMBER
STANDARD CONSTRUCTION DETAILS (SCD)		RCD/600/6	STANDARDS	MARCH 2013	CC	SCD	00606