




PAVEMENT TYPE 1A :
FULLY FLEXIBLE AND FLEXIBLE COMPOSITE CONSTRUCTION
NEW BUILD AND WIDENING SCHEMES

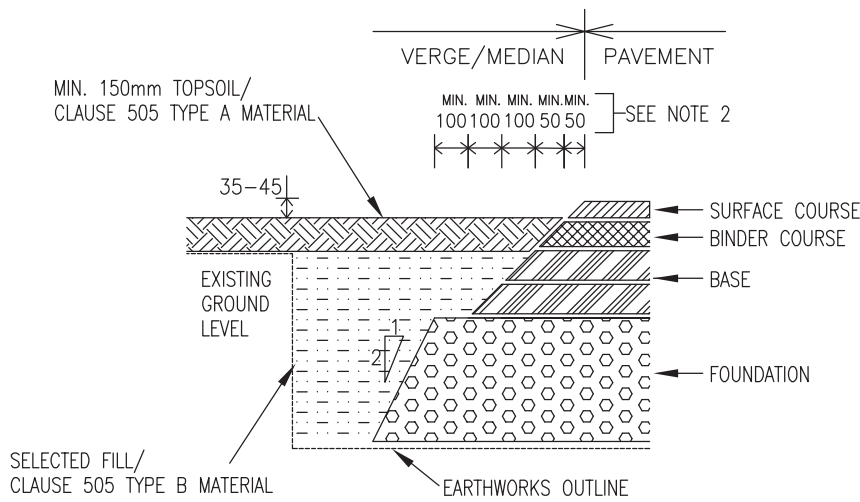


PAVEMENT TYPE 1B :
FULLY FLEXIBLE AND FLEXIBLE COMPOSITE CONSTRUCTION
OVERLAY SCHEMES (SEE NOTE 1)

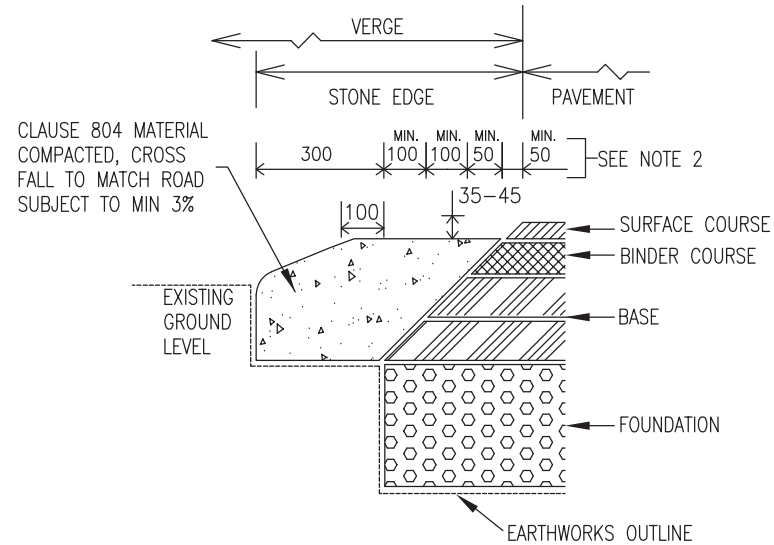

PAVEMENT TYPE 2 :
RIGID CONSTRUCTION (CRCP)

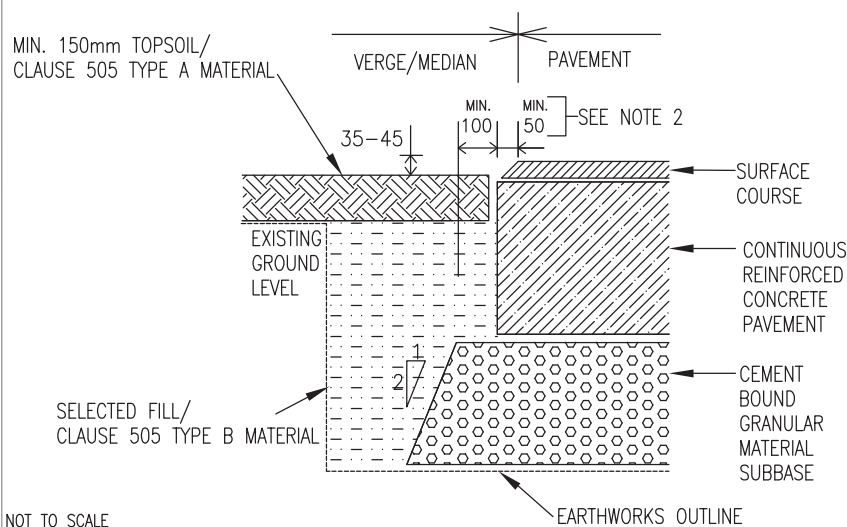

PAVEMENT TYPE 3 :
RIGID CONSTRUCTION (CRCB)

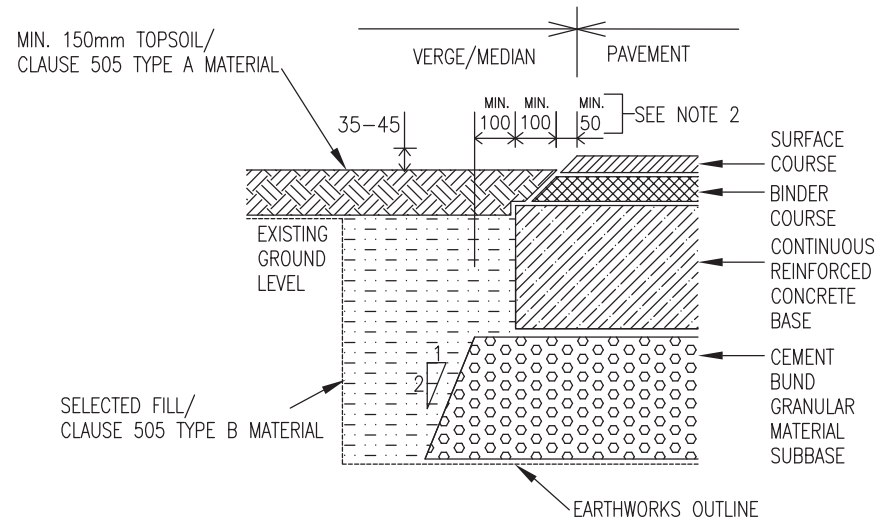

NOTES:

- OVERLAY/INLAY SCHEMES TO INCLUDE RESURFACING AND STRENGTHENING
- MINIMUM DIMENSION AS SHOWN TO BE INCREASED IN ACCORDANCE WITH THICKNESS OF LAYER
- FREESTANDING EDGE OF ALL BITUMINOUS LAYERS TO BE FINISHED TO FORM A 45° OR 60° ANGLE
- FREESTANDING EDGE ON THE OUTSIDE OF THE FINISHED PAVEMENT ON THE HIGH AND LOW SIDES OF THE CAMBER TO BE TREATED IN ACCORDANCE WITH SERIES 900.

TII PUBLICATION NUMBER: CC-SCD-00701

NOT TO SCALE