NOTES :-
1. ALL DIMENSIONS ARE IN MILLIMETRES.
2. IN SITU CONCRETE KERBS SHALL COMPLY WITH THE RECOMMENDATIONS OF B.S. 5931.
3. KERBS SHALL BE PROTECTED FROM THE EFFECTS OF ADVERSE WEATHER UNTIL CURED.
4. DROP KERB HEIGHT VARIES FROM 25mm FOR VEHICULAR ACCESSES AND 0-6mm FOR PEDESTRIAN CROSSING.

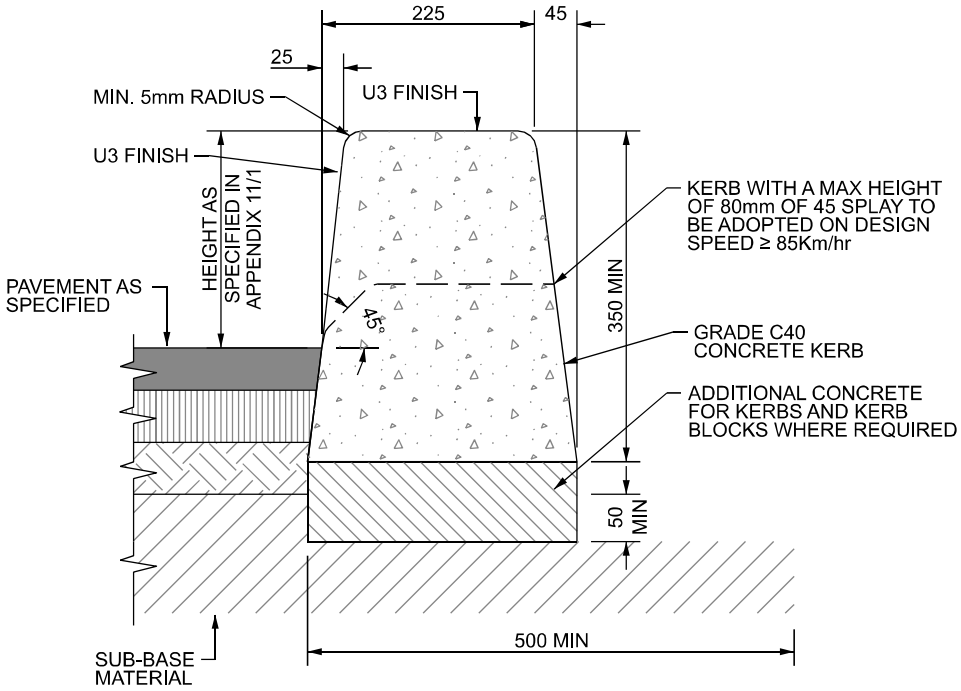

STANDARD IN SITU CONCRETE KERB

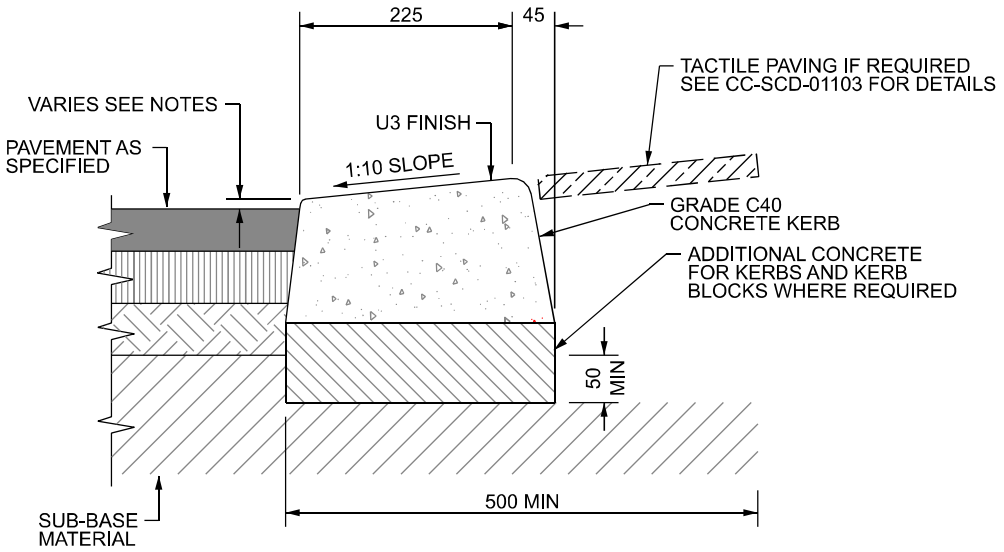

IN SITU CONCRETE DROP KERB

Bonneagar Iompair Éireann
Transport Infrastructure Ireland

ACTIVITY: CC Construction & Commissioning

PUBLICATION TITLE: KERBS, FOOTWAYS AND PAVED AREAS
IN SITU KERBS

STREAM: STANDARD CONSTRUCTION DETAILS (SCD)

HISTORICAL REFERENCE	DOCUMENTATION SET	PUBLICATION DATE	PUBLICATION NUMBER		
			ACTIVITY	STREAM	DRAWING NUMBER
RCD/1100/2	STANDARDS	DECEMBER 2010	CC	SCD	01102