




**KEY**

-  BUFF TACTILE BLISTER PAVING (400mm x 400mm)
- LC  CROSSING SPECIFIC LIGHTING COLUMN LOCATED AT REAR OF FOOTPATH WHERE POSSIBLE

Withdrawn

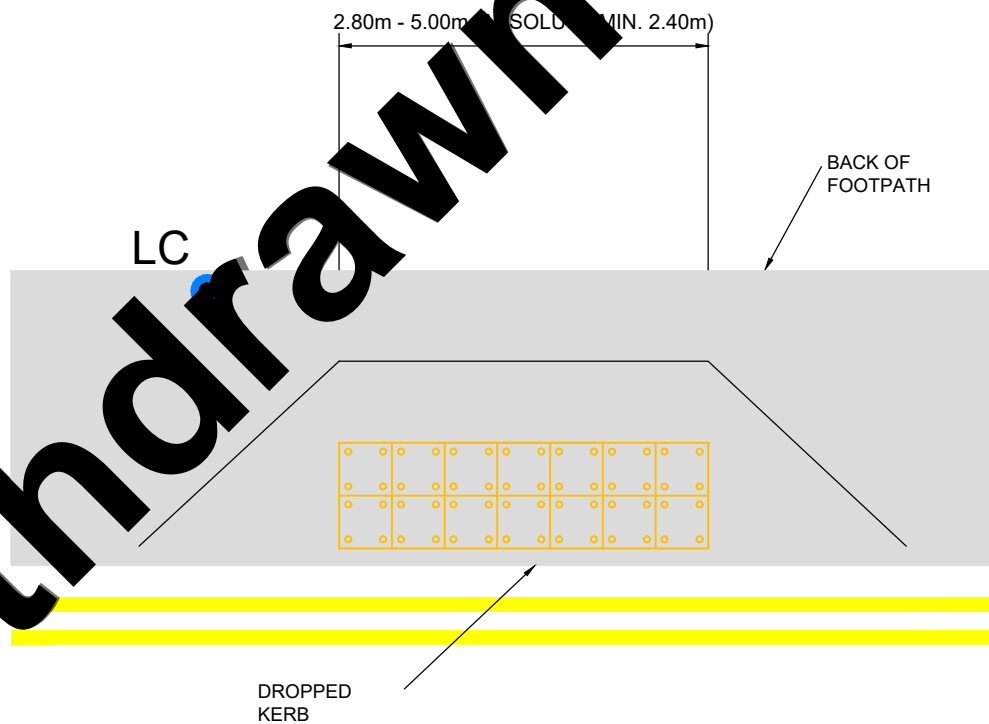

**NOTES:**

1. FOR TACTILE PAVING DETAILS REFER CC-SCD-05024, CC-SCD-05025, CC-SCD-05026, CC-SCD-05030 AS RELEVANT
2. DROPPED KERBS MUST BE LAID FLUSH WITH CARRIAGEWAY SURFACE WITH AN ABSOLUTE MAXIMUM UPSTAND OF 6mm.
3. THE REQUIREMENTS FOR LIGHTING AT PEDESTRIAN CROSSINGS ARE DETAILED IN DN-LHT-03038.
4. THE EXACT LIGHTING COLUMN POSITION WILL BE SUBJECT TO THE LIGHTING DESIGN WHICH SHOULD BE UNDERTAKEN BY A COMPETENT AND EXPERIENCED ROAD LIGHTING ENGINEER.



ACTIVITY



PUBLICATION TITLE

LIGHTING DETAIL,  
ALL TYPES OF CROSSING

STREAM

STANDARD CONSTRUCTION DETAILS (SCD)

HISTORICAL REFERENCE

PCS 008

DOCUMENTATION SET

STANDARDS

PUBLICATION DATE

AUGUST 2018

PUBLICATION NUMBER

CC SCD 05032