



NORMAL CARRIAGEWAY WITH FILTER DRAIN

- NOTES
1. DESIRABLE MINIMUM MEDIAN GRADIENT IS 4%.
  2. REQUIREMENTS FOR SIGHT DISTANCE AND THE SET-BACK AND CLEARANCES FOR SAFETY FENCES IN ACCORDANCE WITH TD 19, MUST BE PROVIDED. HEDGE AND BARRIER OFFSETS MUST ALSO SATISFY SIGHT DISTANCE REQUIREMENTS.

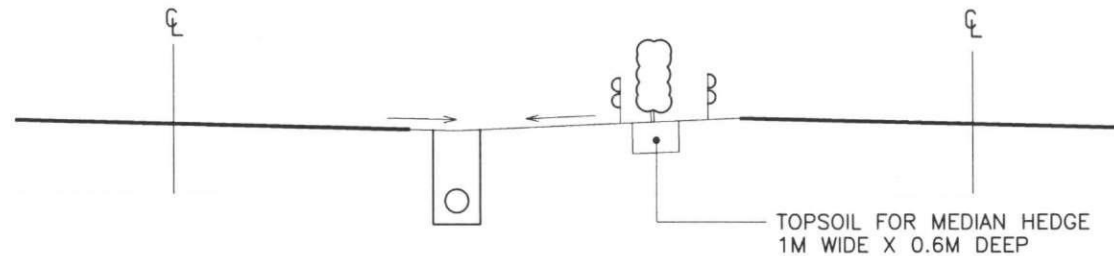

RIGHT HAND CURVE WITH LEFT HAND SIDE FILTER DRAIN OR CARRIER DRAIN

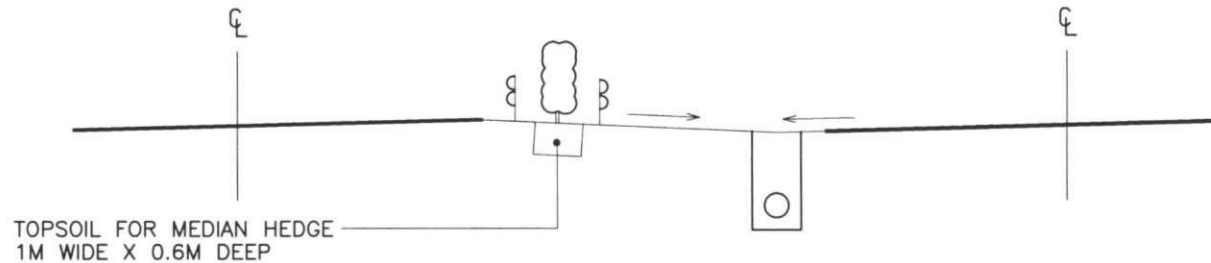

LEFT HAND CURVE WITH RIGHT HAND SIDE FILTER DRAIN OR CARRIER DRAIN