



Bonneagar Iompair Éireann
Transport Infrastructure Ireland

TII Publications

GE PE DN CC OP AM RE

Terminal Assessment Procedure

DN-REQ-03080
September 2017

Withdrawn

About TII

Transport Infrastructure Ireland (TII) is responsible for managing and improving the country's national road and light rail networks.

About TII Publications

TII maintains an online suite of technical publications, which is managed through the TII Publications website. The contents of TII Publications is clearly split into 'Standards' and 'Technical' documentation. All documentation for implementation on TII schemes is collectively referred to as TII Publications (Standards), and all other documentation within the system is collectively referred to as TII Publications (Technical).

Document Attributes

Each document within TII Publications has a range of attributes associated with it, which allows for efficient access and retrieval of the document from the website. These attributes are also contained on the inside cover of each current document, for reference.

TII Publication Title	<i>Terminal Assessment Procedure</i>
TII Publication Number	<i>DN-REQ-03080</i>

Activity	<i>Design (DN)</i>		Document Set	<i>Standards</i>
Stream	<i>Road Equipment (REQ)</i>		Publication Date	<i>September 2017</i>
Document Number	<i>03080</i>		Historical Reference	<i>N/A</i>

TII Publications Website

This document is part of the TII publications system all of which is available free of charge at <http://www.tiipublications.ie>. For more information on the TII Publications system or to access further TII Publications documentation, please refer to the TII Publications website.

TII Authorisation and Contact Details

This document has been authorised by the Director of Professional Services, Transport Infrastructure Ireland. For any further guidance on the TII Publications system, please contact the following:

Contact: Standards and Research Section, Transport Infrastructure Ireland
Postal Address: Parkgate Business Centre, Parkgate Street, Dublin 8, D08 DK10
Telephone: +353 1 646 3600
Email: infoPUBS@tii.ie

TII Publications



Activity:	Design (DN)
Stream:	Road Equipment (REQ)
TII Publication Title:	Terminal Assessment Procedure
TII Publication Number:	DN-REQ-03080
Publication Date:	September 2017
Set:	Standards

Contents

1. Introduction	1
2. Application Procedure	3
3. Assessment Procedure	4
4. Testing & Performance Requirements for Terminals.....	5
5. References.....	8
Appendix A:	9
Terminal Assessment Application Checklist	9
Appendix B:	11
Individual Terminal Test Assessment Form.....	11
Appendix C:	16
Terminal Assessment Summary	16

**Updates to TII Publications resulting in changes to
Terminal Assessment Procedure DN-REQ-03080**

Date: September 2017

Page No: 5 - 7

Section No: 4

Amendment Details:

This Standard supersedes DN-REQ-03080 dated April 2017. The principle changes from the previous standard are:

- a) Section 4.1 Test Installation has been updated to state “To achieve a direction class all impact tests shall be carried out on the same barrier installation, with the same connection/ transition, excluding frontal impact tests where a barrier may not be needed”.
- b) New Figure 4.1 included showing an example of test approach 6 with the impact point at an appropriate distance from the terminal to barrier connection to assess the potential for pocketing.

The format of the checklists in the appendices has also been updated.

Contents Table

1. Introduction	1
1.1 General	1
1.2 Scope	1
1.3 Definitions	2
2. Application Procedure	3
2.1 General	3
2.2 Application Costs	3
2.3 Application Enquiries	3
3. Assessment Procedure	4
3.1 General	4
3.2 Assessment Results	4
4. Testing & Performance Requirements for Terminals	5
4.1 Test Installation	5
4.2 Use with Other Barriers	5
4.3 Critical Impact Point	5
5. References	8
5.1 TII Publications	8
5.2 Irish and European Standards	8
Appendix A:	9
Terminal Assessment Application Checklist	9
Appendix B:	11
Individual Terminal Test Assessment Form	11
Appendix C:	16
Terminal Assessment Summary	16

1. Introduction

1.1 General

Terminals are an important and integral part of a Vehicle Restraint System (VRS) installation. Collision records from around the world have shown that improper terminal installation can have a significant impact on road user safety. Standardised full-scale impact testing is a robust method for assessing the level of safety provided by all VRS, including terminals. It is not practical to test every single scenario observed on the road therefore full-scale tests are used to evaluate the worst case scenario.

There is currently no harmonised European Standard for the testing and approval of terminals for use with VRS and therefore terminals are not a CE marked product. Transport Infrastructure Ireland (TII) has therefore implemented the testing requirements contained in the Draft standard prEN 1317-7:2014 Test methods for the terminals of safety barriers within DN-REQ-03034 Safety Barriers. To ensure that a standardised approach is applied to the evaluation of terminal arrangements proposed for use on the Irish national road network, TII has also established the Terminal Assessment Procedure outlined in this Standard. The assessment criteria presented in this Standard will ensure that a standardised and detailed quality assessment will be undertaken for each impact test carried out on a proposed terminal with the ultimate objective of improving the safety of road users.

Terminal systems deemed suitable for use on Irish national roads following assessment under this Standard will be added to the Compliant Terminal Systems list accessible through the Downloads section of the TII Publications website <http://tiipublications.ie/downloads/>.

1.2 Scope

The scope of this Standard covers all terminals of performance class T110 (P4) proposed for use on the Irish national road network.

The safety performance and testing requirements for terminals are based upon the principles contained in prEN 1317-7:2014 and are outlined in DN-REQ-03034. Further guidance and clarification is contained in this Standard. The assessment procedure is not intended to provide an “approval” or “refusal” of a proposed system. Assessments are carried out to check compliance against the requirements within DN-REQ-03034.

The assessment shall consist of an independent professional review of the test documentation provided by the supplier as per the requirements contained within this document. The supplier shall ensure that all documents provided are accurate and genuine.

Compliance with the requirements of this Standard shall not automatically approve a terminal for use with any type of barrier. Requirements regarding the use of a terminal with particular barrier systems are set out in DN-REQ-03034 and in Section 4.2 of this document. A terminal assessed in isolation may be unsuitable for use with certain types of barrier systems and approval for use with different system shall be sought from TII.

Terminals intended for use on two directional undivided roads will require the terminal to be tested to ‘Test Approach 6’ as detailed in prEN 1317-7:2014. The terminal system shall in this case be deemed to include the transition to the adjacent connecting barrier. The outcome of the assessment under this procedure, and the subsequent inclusion on the TII Compliant Terminal Systems list will be for the terminal system including the transition. The terminal and transition may be connected to barrier types other than that it was tested with subject to the requirements of Section 4.2. Where the terminal is to be used in conjunction with a different transition than that it was tested with, approval for use shall be sought from TII as per Section 4.2 of this Standard.

Compliance with the requirements of this Standard shall not indemnify the supplier against any claims in law. TII reserves the right to withdraw a system from the Compliant Terminal Systems list if there is evidence that the system performs in a different way from that shown in the Initial Type Test or for any other reason for which it sees fit.

1.3 Definitions

For the purpose of this Standard, the following terms defined in IS EN 1317-1 apply:

- c) Vehicle restraint system
- d) Safety barrier

The following terms defined in DN-REQ-03034 also apply:

- a) Hazard
- b) Dynamic Deflection

Particular terms used in this Standard are defined as follows:

- a) **Bi-directional terminal:** A terminal designed and tested to perform at both the approach and departure ends of a barrier.
- b) **Critical Impact Point:** An impact point identified to reasonably represent the worst case for testing.
- c) **Pocketing:** The effect where an errant vehicle pockets or snags at the connection point between a safety barrier and an end terminal due to the difference in dynamic deflection or stiffness between the two elements.
- d) **TII Compliant Terminal Systems:** A terminal system assessed as having undergone appropriate testing using the procedure outlined in this Standard which is approved for use on Irish national roads.
- e) **Terminal:** A product at the beginning and/or end of a safety barrier to reduce hazards for passenger cars that would result from the use of an un-treated beginning or end of the barrier. A terminal may include a length of connecting barrier if it is required as part of the working mechanisms of the terminal.
- f) **Transition:** A connection of two VRS of different designs and/or performances; may include the connection between a safety barrier and an end terminal.
- g) **Uni-directional approach terminal:** A terminal designed and tested to perform at the approach end of a safety barrier only.

2. Application Procedure

2.1 General

Applications for assessment shall be submitted to TII through the Departures from Standards website which can be accessed through the TII Publications website home page.

The following documents and media shall be submitted as a minimum for each impact test:

- Full test report in accordance with EN1317 Parts 1 and 4 or 7 as appropriate;
- High speed and real time videos of test coverage as specified in the relevant part of EN1317;
- Still photographs of complete installation before and after impact;
- Still photographs of vehicle before and after impact;
- Technical drawings of the test item and connected barrier including transition details;
- Confirmation letter from the test house which states that the test complies with the relevant requirements of EN1317;
- CE Certificate and declaration of performance to EN 1317-5 for the connected barrier; and
- Evidence of a suitable quality control system (Factory Production Control) equivalent to EN ISO 9001 and addresses the requirements of EN 1317-5 for the manufacture of the terminal.

The applicant shall complete and submit the Terminal Assessment Application Checklist provided in Appendix A of this document which is available for download through the Downloads section of the TII Publications website <http://tiipublications.ie/downloads/>.

No assessment will be undertaken until all documentation listed in the Terminal Assessment Application Checklist is submitted to TII.

2.2 Application Costs

There is no application charge to a supplier proposing a terminal system for an initial assessment under this procedure. Any subsequent applications for re-assessment of a terminal due to the system initially being deemed to not having undergone appropriate testing shall be subject to a cost at a rate to be set by TII.

2.3 Application Enquiries

Any enquiries regarding an application submitted under the TII Terminal Assessment Procedure with regard to a specific product shall be submitted to barriers@tii.ie.

3. Assessment Procedure

3.1 General

The assessment procedure shall commence once all required documents and media have been received by TII.

An independent professional review shall be undertaken of the documents submitted for each test completed on the terminal to assess the terminal's conformity with the safety performance and testing requirements set out in DN-REQ-03034.

The Individual Terminal Test Assessment Form, as shown in Appendix B, shall be used as a standard template of review and as a checklist for the minimum requirements of each individual impact test. Additional checks may be completed if it is felt necessary. TII may request further information from the applicant to support any further checks deemed necessary to complete the assessment.

3.2 Assessment Results

The findings of the independent review for each impact test shall be summarised in the "Terminal Assessment Summary", as shown in Appendix C of this document. The decision to include or not to include a proposed system on the Compliant Terminal Systems list shall be taken by TII based upon the findings of the independent review. The supplier of the system being assessed shall be informed of the assessment findings through a letter issued by TII.

Suppliers of terminal systems that are deemed to have not undergone appropriate testing based on the assessment of the test results and hence are not acceptable for use on the Irish national road network shall be informed of this with reasoning through a letter issued by TII. Any appeals made to TII on the findings of an assessment shall be treated as a new application for assessment and shall be priced and charged as such. This excludes minor changes and minor reviews where additional clarification material is provided by the applicant.

4. Testing & Performance Requirements for Terminals

The testing and performance requirements for terminals shall be as described in DN-REQ-03034, with reference to EN1317-1:2010, prEN 1317-7:2014 and ENV 1317-4:2002, with additional clarifications provided in this Section.

4.1 Test Installation

To achieve a direction class all impact tests shall be carried out on the same barrier installation, with the same connection/ transition, excluding frontal impact tests where a barrier may not be needed. This is especially important for side impact tests with Test Approaches 4 and 6 as outlined in prEN 1317-7:2014. The objective of these tests is to demonstrate the potential for pocketing; a direct result of a sudden change in stiffness at the connection between a terminal and connecting barrier.

4.2 Use with Other Barriers

Once a terminal is assessed as being compliant by TII it will be added to the TII Compliant Terminal Systems list, including details of the connecting barrier and associated transition. If the same terminal is proposed to be connected to barriers other than that which it was tested with i.e. a new transition and barrier, TII must be notified of the proposed new transition and connecting barrier details by email to barriers@tii.ie. Dependant on the details of the proposed transition and connecting barrier, TII will either add the new barrier connection to the TII Compliant Terminal System list or may request further information. A simulated crash test may be required using data from the initial type testing of the terminal and data obtained for the connecting safety barrier. A written report by a qualified designer setting out the evidence and/or methods used including the product specification, calculations and simulated test results compared to original values may be requested. Factors that may affect whether or not additional testing or simulations will be required when connecting to other barriers may include:

- a) the cross-section and material of the proposed transition and connecting barrier;
- b) the difference in dynamic deflection between the proposed transition and connecting barrier and those that were used in the initial type testing; or
- c) whether or not the terminal is proposed for use as a uni-directional approach terminal, a uni-directional departure terminal or a bi-directional terminal.


4.3 Critical Impact Point

The selection of the critical impact point should generally be carried out in accordance with the guidance provided in prEN 1317-7:2014. Further clarification is presented below to ensure the impact points are selected so as to achieve the objectives of the required tests.

4.3.1 Test Approach 6


The aim of this test is to evaluate the danger of pocketing where there is a sudden change in stiffness between the connecting barrier and the terminal. It is important to choose an impact point which has the highest potential for pocketing. For semi-rigid VRS, this is generally 2 to 5 metres from the end of terminal dependant on the VRS specific details as illustrated in Figure 4.1.

Figure 4.1: Example of test approach 6 with impact point at an appropriate distance from the terminal to barrier connection to assess the potential for pocketing

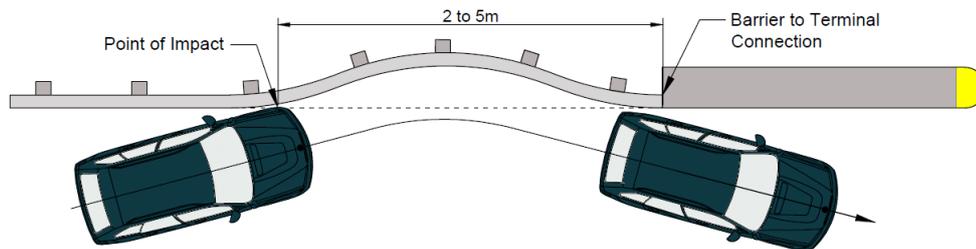


If the impact point is too far from the connection to the terminal the test vehicle may be redirected and leave the barrier prior to reaching and interacting with the terminal connection point, which is the area that has the highest potential for pocketing. This is demonstrated in Figure 4.2 where the main objective of the impact test is not fulfilled and it may not be deemed acceptable when assessed under the Terminal Assessment Procedure outlined in this Standard.

Figure 4.2: Example of test approach 6 with impact point too far away from the end of terminal

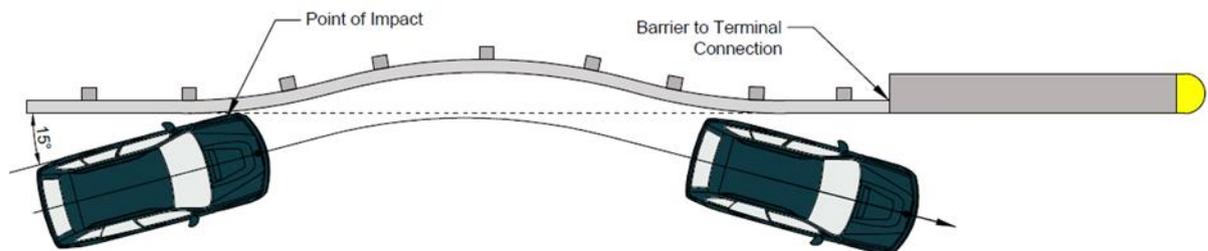

If the impact point chosen is too close to, or exactly at the terminal connection point, as illustrated in Figure 4.3, sufficient space may not be provided for the barrier to deflect and therefore potential pocketing to occur. In this scenario the main aim of the impact test is not fulfilled and it may not be deemed acceptable when assessed under the Terminal Assessment Procedure outlined in this Standard.

Figure 4.3: Example of approach number 6 test with impact point too close to the end of terminal

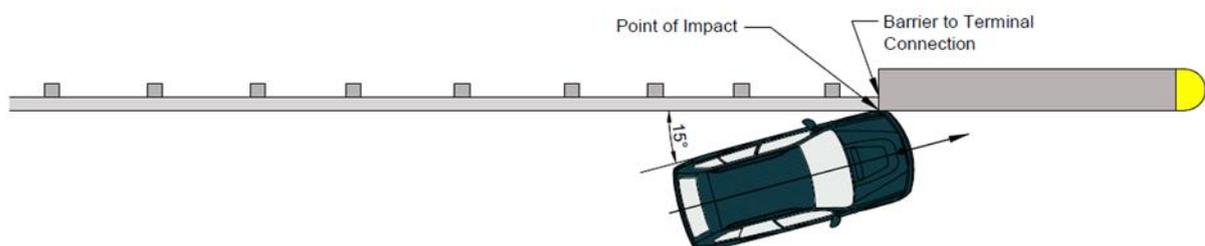


4.3.2 Test Approach 4

The aim of this test is to evaluate the side impact behaviour and possible danger of pocketing in cases where the barrier is stiffer than the terminal to which it is connected.

In rare cases a terminal may be long enough that the standard impact point of $2/3L_s$ (L_s = structural length of the terminal) may be too far away from the end of the barrier, as shown in Figure 4.4. In this scenario, the main aim of the impact test may not be fulfilled and it may not be deemed acceptable when assessed under the Terminal Assessment Procedure outlined in this Standard.

Figure 4.4: Example of approach number 4 with impact point too far away from the terminal

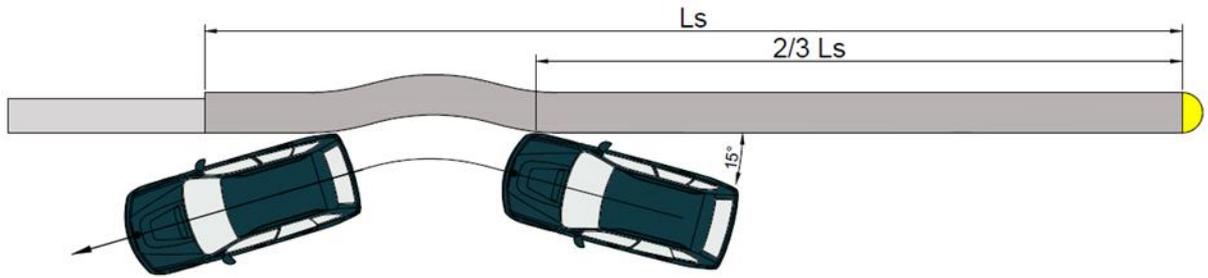

For both Test Approach 4 and Test Approach 6, if the critical impact point chosen is outside the guidance values outlined in this Section, the reasoning for this based on computational mechanics i.e. simulation must be included within the application submitted to TII for assessment.

5. References

5.1 TII Publications

DN-REQ-03034 Safety Barriers

5.2 Irish and European Standards

IS EN 1317-1: 2010 Road restraint systems - Part 1: Terminology and General Criteria for Test Methods

IS ENV 1317-4: 2001 Road Restraint Systems - Part 4: Performance Classes, Impact Test Acceptance Criteria and Test Methods for Terminals and Transitions

prEN 1317-7, Road Restraint Systems - Part 7: Performance Classes, Impact Test Acceptance Criteria and Test Methods for Terminals of Safety Barriers

Appendix A:

Terminal Assessment Application Checklist

TERMINAL ASSESSMENT CHECKLIST		
Submission Date:	Click here to enter a date.	Contact Details:
Manufacturer:		
Product Name:		

Documents and Multimedia to be Provided for Each Test*			
#	Item	Comment	Item Submitted (Y/N)
1	Full test report	In accordance with EN1317 Parts 1 & 4/7	Choose an item.
2	High speed & real time videos	Of test coverage as specified in relevant part of EN1317	Choose an item.
3	Still photographs	Of complete installation before and after impact	Choose an item.
4	Still photographs	Of Vehicle before and after impact	Choose an item.
5	Technical drawings	Of test item, transition and connected barrier	Choose an item.
6	Confirmation from test house	That the test complies with the relevant requirements of EN1317	Choose an item.
7	CE Certificate and declaration of performance for connected barrier	Showing performance parameters such as containment level, dynamic deflection, working width, impact severity level	Choose an item.
8	Evidence of a suitable quality control system	Factory production control system, which complies with EN ISO 9000 and addresses the requirements of EN 1317-5 for the manufacture of the terminal	Choose an item.

Tests Submitted				
#	Test Type	Test House	Test No	Comments
1				
2				
3				
4				
5				
6				

Submitted By:

Signature:

*All documents which are not English will have to be translated.

Appendix B:
Individual Terminal Test
Assessment Form

Individual Terminal Test Assessment Form
Submitted for Compliance with EN1317-1 and ENV1317-4:2001 or prEN1317-7:2014

1) General Information			
Assessment Date:		Contact Details:	
Manufacturer:			
Product Name:			
Single or Double Sided:			
Impact Test Type:			
Test Standard:			
Test House:			
Test Date:		Test No:	
Photo(s) of Product from Impact Test			

2) Details of the Barrier Tested With	
Manufacturer:	
Product Name:	
Product Description:	
Containment Level:	
Working Width:	
Dynamic Deflection:	
Impact Severity Level:	

3) Installation		
Terminal installed with sufficient length of barrier to demonstrate performance? (Y/N)		Choose an item.
Does installation match technical drawings provided? (Y/N)		Choose an item.
Is L _s determined? (Y/N) _ Value		Choose an item.
Is L _t determined? (Y/N) _ Value		Choose an item.
Is datum point justified? (Y/N) _ Value		Choose an item.

4) Test Site	
Is test lab accredited for EN1317? (Y/N)	Choose an item.
Is test area flat with gradient not exceeding 2.5%? (Y/N)	Choose an item.
Is test area clear of standing water, ice or snow? (Y/N)	Choose an item.
Enough space provided for demonstration of exit box characteristics? (Y/N)	Choose an item.

5) Impact Point (IP) Location	
Impact Point Location:	
Is the IP as described in standard? (Y/N)	Choose an item.
Is justification provided if other IP is chosen? (Y/N/NA)	Choose an item.
Is IP representative of worst case scenario? (Y/N)	Choose an item.
Is IP identified in the report match the actual achieved in the test? (Y/N)	Choose an item.

6) Test Vehicle				
Is the test vehicle representative of current traffic in Europe? (Y/N)				Choose an item.
Are tyres inflated to manufacturers Specification? (Y/N)				Choose an item.
Is the test vehicle road worthy? (Y/N)				Choose an item.
	Target Value	Tolerance	Actual	Compliant? (Y/N)
Total Mass (kg):				Choose an item.
Test Inertial Mass (kg):				Choose an item.
Maximum Ballast (kg):				Choose an item.
ATD Mass (kg):				Choose an item.
Wheel Track (m):				Choose an item.
CGX (m):				Choose an item.
CGY (m):				Choose an item.
CGZ (m):				Choose an item.

7) Impact Conditions				
	Target Value	Tolerance	Actual	Compliant? (Y/N)
Impact Speed (km/h):				Choose an item.
Impact Angle (°):				Choose an item.
Is combined tolerances within envelope? (Y/N)				Choose an item.
Does test footage match values shown in the report? (Y/N)				Choose an item.

8) Impact Severity		
ASI:	THIV:	Class:

9) Permanent Displacement		
D_a (m) [S]	D_d (m) [T]	PLD Class ($x\#y\#$)
Any detached parts of terminal over 2kg included in classification? (Y/N/NA)		NA
Does test footage match values shown in the report? (Y/N)		Choose an item.

10) Exit Box		
Approach Side Z_a (m)	Departure Side Z_d (m)	Exit Box Class, $Z_\#$
Does test footage match values shown in the report? (Y/N)		Choose an item.

11) Vehicle & Terminal Impact Behaviour	
No parts of terminal penetrated passenger compartment? (Y/N)	Choose an item.
No deflection of / intrusion into passenger compartment? (Y/N)	Choose an item.
No principal longitudinal element of barrier or terminal break? (Y/N)	Choose an item.
Test vehicle did not roll over? (Y/N)	Choose an item.
Test vehicle did not have excessive roll, yaw or pitch? (Y/N)	Choose an item.

12) Verdict	
Is the test compliant with TII requirements? (Y/N)	Choose an item.
With following Notes to Consider:	
Items of High Importance:	
Items of Medium Importance:	
Items of Low Importance:	

Assessed By: _____

Signature: _____

Appendix C: Terminal Assessment Summary

TERMINAL ASSESSMENT SUMMARY		
Date:	Click here to enter a date.	Contact Details:
Manufacturer:		
Product Name:		

Photo(s) of Terminal

Testing Programme				
#	Test Code	Test Report Reviewed (Y/N)	Tet Compliant (Y/N)	Comments
1		Choose an item.	Choose an item.	
2		Choose an item.	Choose an item.	
3		Choose an item.	Choose an item.	
4		Choose an item.	Choose an item.	
5		Choose an item.	Choose an item.	
6		Choose an item.	Choose an item.	
Are all side impact tests* carried out with same connection with same barrier? (Y/N)				Choose an item.
Is permission received from manufacturer of Barrier 1? (Y/N/NA)				Choose an item.

Performance Class:	
Direction Class:	
Single or Double Sided:	
Permitted Use in TII Network	
Speed Limit of Road (km/h)	Direction of Installation

Impact Severity Level (ISL)				
#	Test Code	ASI	THIV	Impact Severity Class (ISC) for Test
1				
2				
3				
4				
5				
6				
Impact Severity Class of Product:				

Permanent Lateral Displacement (PLD)				
#	Test Code	D _a (m)	D _d (m)	PLD Class (x#y#)
1				
2				
3				
4				
5				
6				
PLD Class of Product:				

* Tests with approach 4, 5 & 6

Exit Box				
#	Test Code	Approach Side Z _a (m)	Departure Side Z _d (m)	Exit Box Class, Z _#
1				
2				
3				
4				
5				
6				
Exit Box Class of Product:				

Properties of Barrier Tested With	
Manufacturer:	
Product Name:	
Product Description:	
Containment Level:	
Working Width:	
Dynamic Deflection:	
Impact Severity Level:	

Assessed By: _____ Signature: _____

Summary	
Is the product compliant with TII requirements? (Y/N)	Choose an item.
With following Notes to Consider:	
<p>Items of High Importance:</p> <p>Items of Medium Importance:</p> <p>Items of Low Importance:</p>	



 Ionad Ghnó Gheata na Páirce,
Stráid Gheata na Páirce,
Baile Átha Cliath 8, D08 DK10, Éire

 Parkgate Business Centre,
Parkgate Street,
Dublin 8, D08 DK10, Ireland

 www.tii.ie

 info@tii.ie

 +353 (01) 646 3600

 +353 (01) 646 3601