



TYPE B1 FOR INTEGRAL BELISHA STREET LIGHT FITTED WITH LANTERN AT 6m HEIGHT

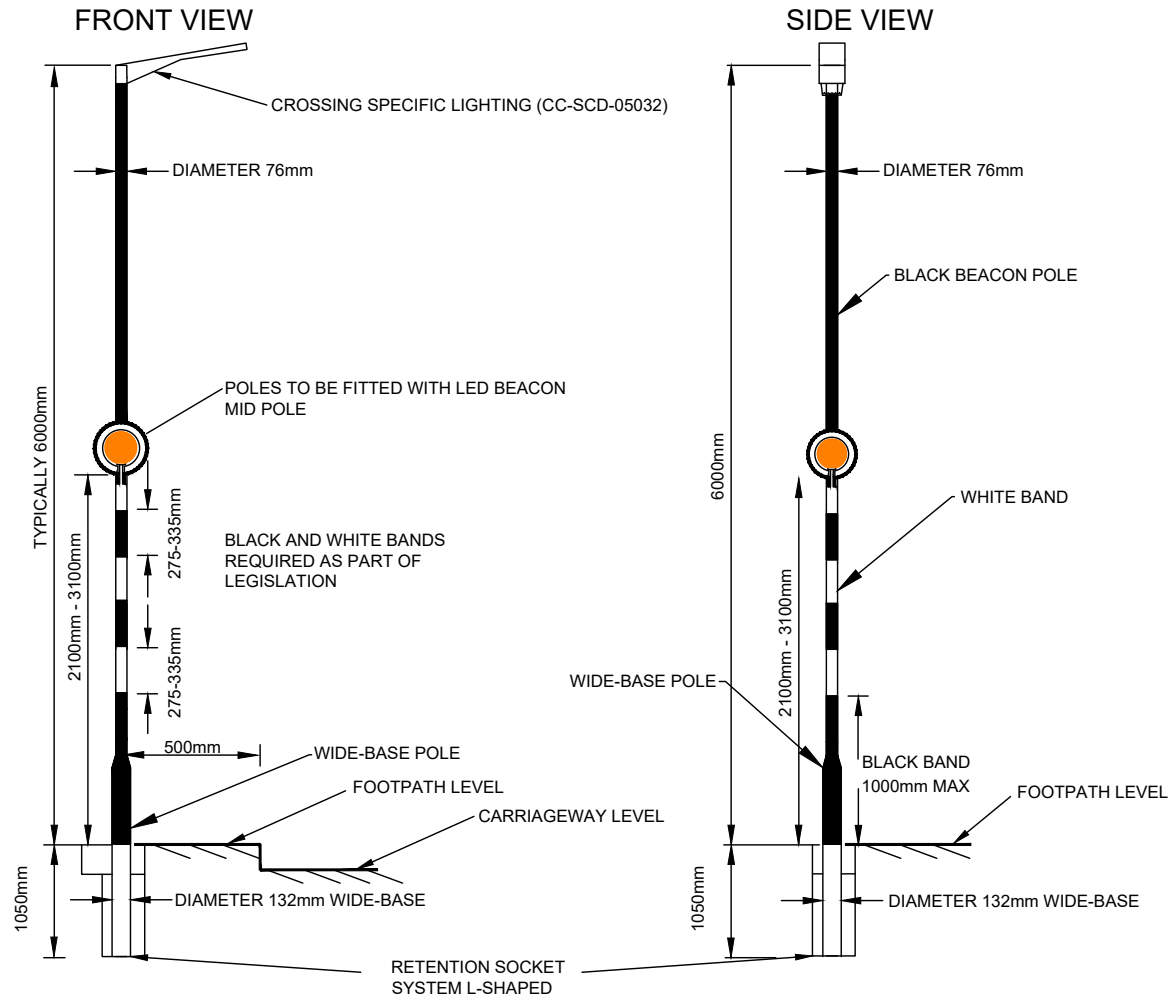

TYPE B2 BEACON ON TOP. NO ADDITIONAL LANTERN

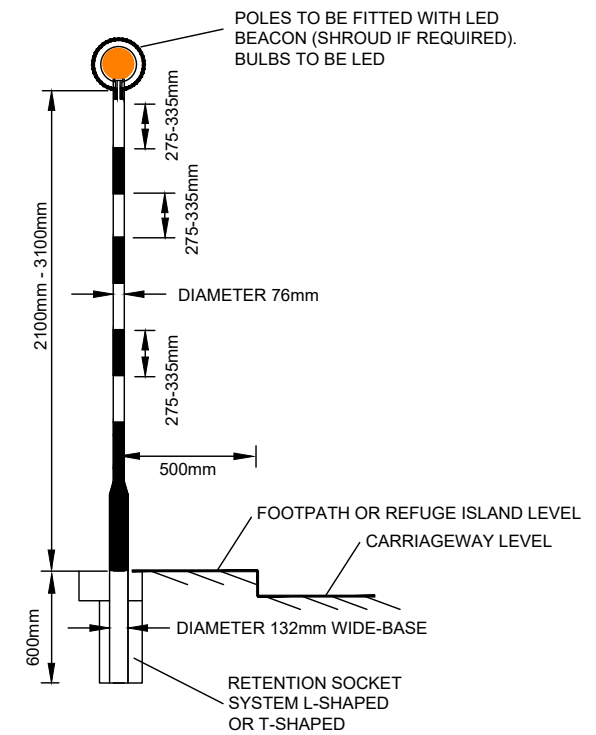

NOTES:

1. WHERE 600mm IS NOT FEASIBLE, E.G. DUE TO UNDERGROUND SERVICES, THE BELISHA BEACON POLE MAY BE CUT FROM THE BOTTOM TO ACHIEVE AN ABSOLUTE MINIMUM OF 340mm.
2. THE RETENTION SOCKET SYSTEM WILL NEED TO BE ADJUSTED IN HEIGHT AND THE FOUNDATION REQUIREMENTS WILL NEED TO BE STRENGTHENED ACCORDINGLY.
3. NO ADDITIONAL SUPPLEMENTARY FLASHING LIGHTS TO BE PLACED ON POLE.
4. LIGHT SENSOR SHALL ADJUST OUTPUT TO AMBIENT LEVELS.



ACTIVITY



PUBLICATION TITLE

BELISHA BEACON POLE DETAIL

STREAM

STANDARD CONSTRUCTION DETAILS (SCD)

HISTORICAL REFERENCE

PCS 017

DOCUMENTATION SET

STANDARDS

PUBLICATION DATE

AUGUST 2018

PUBLICATION NUMBER

CC SCD 05031